


COMBINATORI A STELLA

MULTIPLEXER

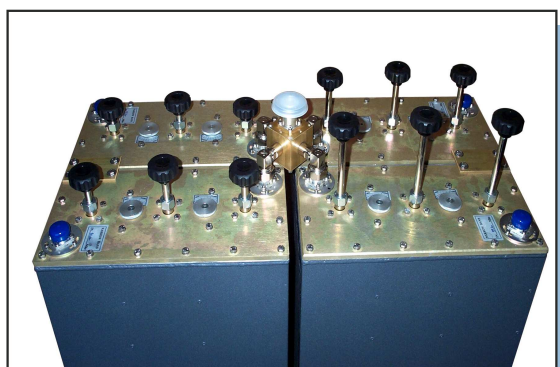

VERSIONE SPECIALE PER SPAZIATURA LIMITATA

Mod.	Freq. Mhz	Imped	SWR	Att.	Conn. In/out	Power	Isol.	Dimens. Cm	Peso
FTT/3000S	87.5-108	50 ohm	< 1.2:1	<0.6 dbd	N-7/16	3x500W	>30db	62x40x130	46Kg
FTT/3000S-H	87.5-108	50 ohm	< 1.2:1	<0.6 dbd	7/16-7/8	3x1KW	>30db	62x40x130	48Kg
FTT/6000S	87.5-108	50 ohm	< 1.2:1	<0.5 dbd	7/16-1+5/8	3x2KW	>30db	62x60x130	85Kg
FTT/7500S	87.5-108	50 ohm	< 1.2:1	<0.5 dbd	7/8-1+5/8	3x2.5KW	>30db	62x60x130	87Kg
FQT/4000S	87.5-108	50 ohm	< 1.2:1	<0.6 dbd	N-7/8	4x500W	>30db	42x90x130	62Kg
FQT/4000S-H	87.5-108	50 ohm	< 1.2:1	<0.6 dbd	7/16-1+5/8	4x1KW	>30db	42x90x130	66Kg
FQT/8000S	87.5-108	50 ohm	< 1.2:1	<0.5 dbd	7/8-1+5/8	4x2KW	>30db	42x130x130	118Kg

NOTE:

Sono composti da tre o più filtri in cavità Triple e dalle opportune linee rigide e hanno tutti gli ingressi selettivi.

All'atto dell'ordine occorre specificare le frequenze di utilizzo.

Versione speciale per spaziatura limitata fra i canali.

