
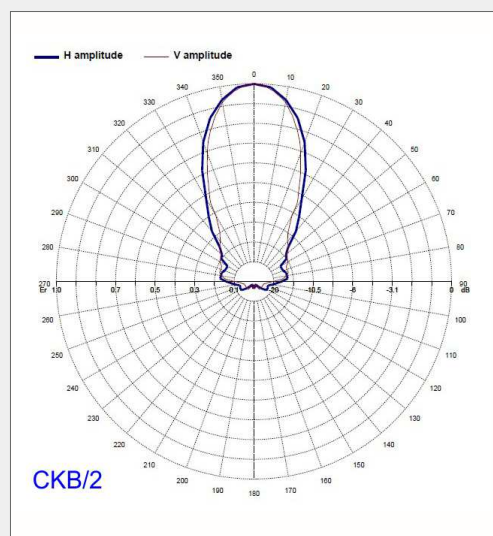


CKB/2A

VHF CORNER REFLECTOR

FEATURES

- CORNER REFLECTOR ANTENNA FOR STL LINK VHF
- VERTICAL/HORIZONTAL POLARIZATION
- CONNECTOR IN N
- WIDE BAND
- MADE OF STAINLESS STEEL
- PTFE INSULATORS
- DC ELECTRICALLY GROUNDED


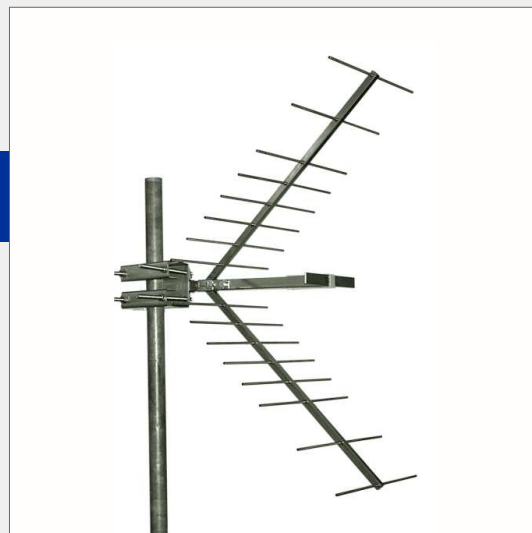


CKB/2B

VHF CORNER REFLECTOR

FEATURES

- CORNER REFLECTOR ANTENNA FOR STL LINK VHF
- VERTICAL/HORIZONTAL POLARIZATION
- CONNECTOR IN **N**
- WIDE BAND
- MADE OF STAINLESS STEEL
- PTFE INSULATORS
- DC ELECTRICALLY GROUNDED

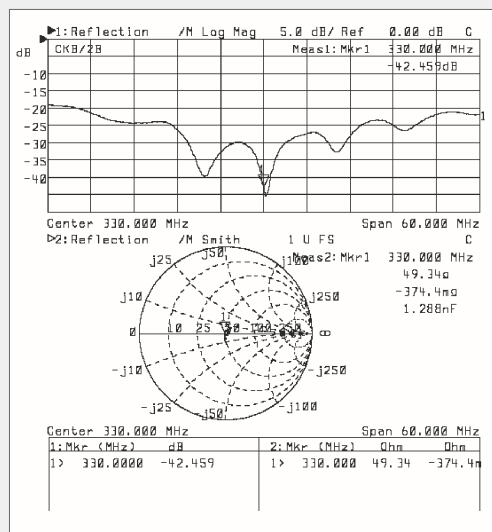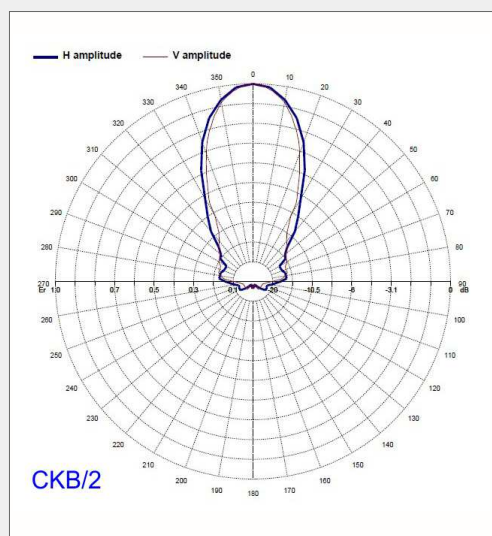

TECHNICAL DATA



Frequency Range	300 - 360Mhz
Impedance	50ohm
Return Loss	≥ 16dB
Gain	9dBd
Power	500W
Wind load at 160Km/h	10kg
Absolute max Wind velocity	220Km/h
External Dimensions	145x95x70cm
Weight	6.5Kg

CKB/2C

UHF CORNER REFLECTOR

FEATURES

- CORNER REFLECTOR ANTENNA FOR STL LINK UHF
- VERTICAL/HORIZONTAL POLARIZATION
- CONNECTOR IN **N**
- WIDE BAND
- MADE OF STAINLESS STEEL
- PTFE INSULATORS
- DC ELECTRICALLY GROUNDED

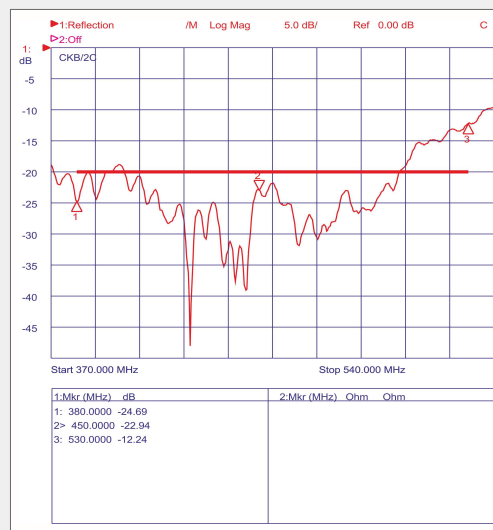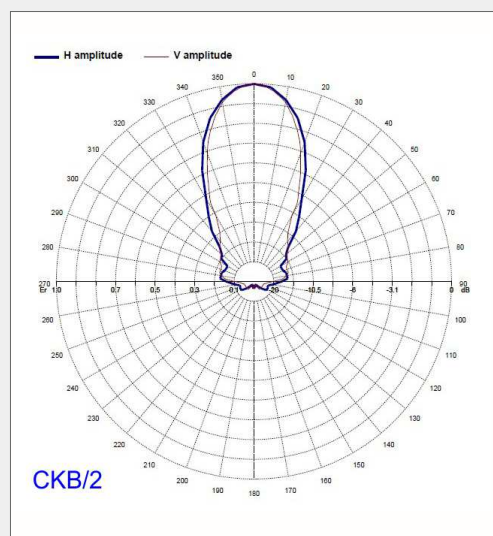

TECHNICAL DATA

Frequency Range 380 - 530Mhz

Impedance 50ohm

Return Loss ≥ 16 dB

Gain 9dBd

Power 500W

Wind load at 160Km/h 8.5kg

Absolute max Wind velocity 220Km/h

External Dimensions 114x75x50cm

Weight 5Kg