

FDB/1031

FM TRIPLE CAVITY FILTER



FEATURES

- FM TRIPLE CAVITY FILTER
- CONNECTORS IN/OUT **N** or **7/16**
- VARIABLE BANDWIDTH
- EXTERNAL BODY IN ALUMINUM
- INTERNAL LINES SILVER PLATED



TECHNICAL DATA

Frequency Range	87.5 - 108Mhz
In and Out Impedance	50ohm
Return Loss	≥ 30dB
Attenuation	≤ 0.5dB
Power * (Connector N version)	800W
Power * (Connector 7/16 version)	1.2KW
Working Temperature	-10 to 45°C
External Dimensions	20x40x130cm
Weight	19Kg
* at max eight above sea level of 1500mt	

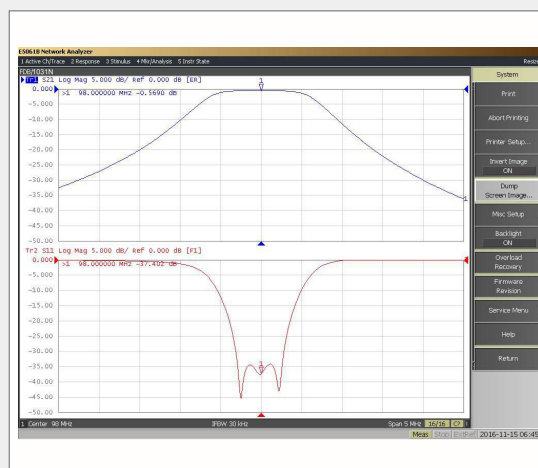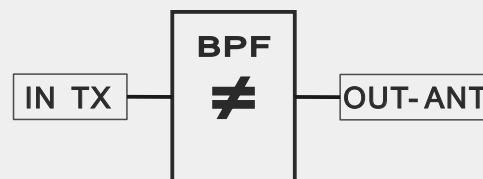

FDB/1033-F

FM TRIPLE CAVITY FILTER

FEATURES



- FM TRIPLE CAVITY FILTER
- CONNECTORS IN/OUT **7/8**
- VARIABLE BANDWIDTH
- EXTERNAL BODY IN ALUMINUM
- INTERNAL LINES SILVER PLATED



TECHNICAL DATA

Frequency Range	87.5 - 108Mhz
In and Out Impedance	50ohm
Return Loss	≥ 30dB
Attenuation	≤ 0.4dB
Power *	3KW
Working Temperature	-10 to 45°C
External Dimensions	20x60x130cm
Weight	27Kg

* at max eight above sea level of 1500mt

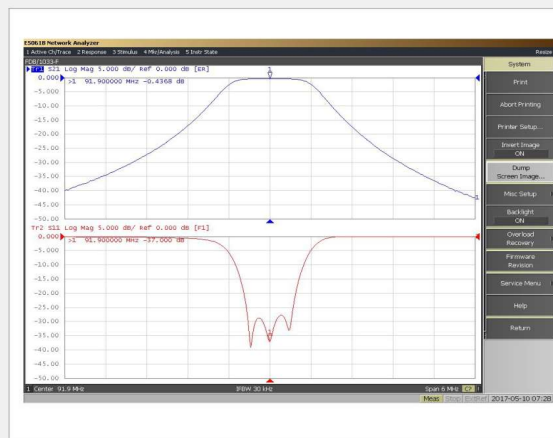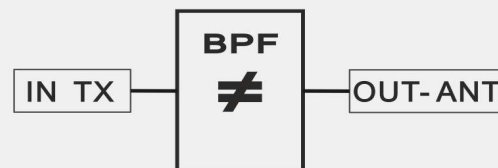

FDB/1033-M

FM TRIPLE CAVITY FILTER

FEATURES



- FM TRIPLE CAVITY FILTER
- CONNECTORS IN/OUT **7/16**
- VARIABLE BANDWIDTH
- EXTERNAL BODY IN ALUMINUM
- INTERNAL LINES SILVER PLATED



TECHNICAL DATA

Frequency Range	87.5 - 108Mhz
In and Out Impedance	50ohm
Return Loss	≥ 30dB
Attenuation	≤ 0.4dB
Power *	2KW
Working Temperature	-10 to 45°C
External Dimensions	20x60x130cm
Weight	27Kg

* at max eight above sea level of 1500mt

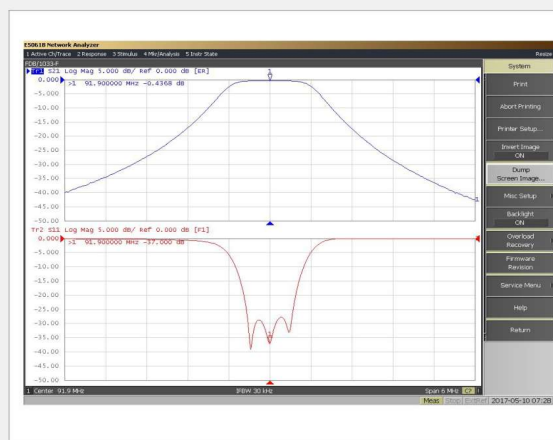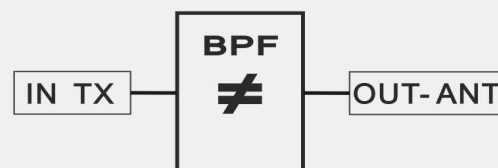

FDB/1035

FM TRIPLE CAVITY FILTER

FEATURES

- FM TRIPLE CAVITY FILTER
- CONNECTORS IN/OUT 7/8 or 1+5/8
- VARIABLE BANDWIDTH
- EXTERNAL BODY IN ALUMINUM
- INTERNAL LINES SILVER PLATED



TECHNICAL DATA

Frequency Range	87.5 - 108Mhz
In and Out Impedance	50ohm
Return Loss	≥ 30dB
Attenuation	≤ 0.35dB
Power *	5KW
Working Temperature	-10 to 45°C
External Dimensions	30x73x130cm
Weight	40Kg

* at max eight above sea level of 1500mt

